



SPEC. 【50ml】 Dimension in mm

ITEM	BASIC	TOL.
Total Height H	73	+0.70, -0.80
OD of body D1	42.5	+0.70, -0.80
OD of lip D2	20	+0.10, -0.30
ID of lip D3	12.6	+/-0.20
OD of neck D4	≤17.0	
ID of neck D5	≥11.5	
Finish Height S1	4.2	+/-0.20
Thickness of bottom S2	3	+2, -1.50
Vertical axle deviation	≤1.9	
Overflow capacity (ml)	≈60	
Mass (g)	≥49.5	
t	≈2	

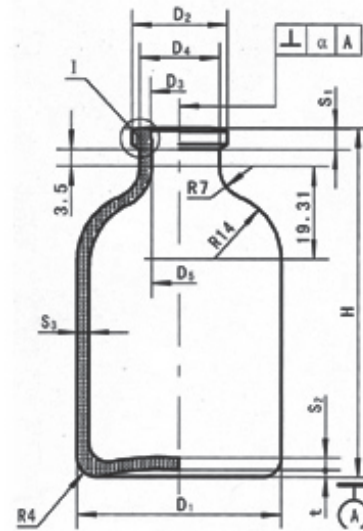

Specification Sheet

Ref. No.: #110501

Glass : USP Type II, III

Color: (Amber and Clear)

Moulded injection vial for antibiotic: (Amber and Clear)

1. Quality Standard: Complying with the norm SFDA YBB00312002.
2. Material: Soda-Lime-Silica Glass
3. Glass Type: USP type II, III
4. Packing: Shrink wrapped first, then packed with carton, or customized
5. Performance: Hydrolytic Resistance shall comply with the requirements special for one of the following classes: ISO 4802-HC2, HC3. Internal pressure resistance shall withstand an internal pressure of 600kPa when tested. Thermal shock resistance shall withstand a thermal shock when subjected to a temperature difference of $\Delta^{\circ}\text{C}$ 42 in accordance with ISO7459.

eRRe
Cam Şişe Ambalaj