


Specification Sheet

SPEC. 【100ml】 Dimension in mm		
ITEM	BASIC	TOL.
Total Height H	94.5	+0.80, -0.90
OD of body D1	51.6	+0.70, -0.80
OD of lip D2	20	+0.10, -0.30
ID of lip D3	12.6	±0.20
OD of neck D4	≤17.0	
ID of neck D5	≥11.5	
Finish Height S1	4.2	±0.20
Thickness of bottom S2	4	±2.00
Vertical axle deviation a	≤1.5	
Overflow capacity (ml)	119	±5
Mass (g)	88.5-98.5	
t	≈2	

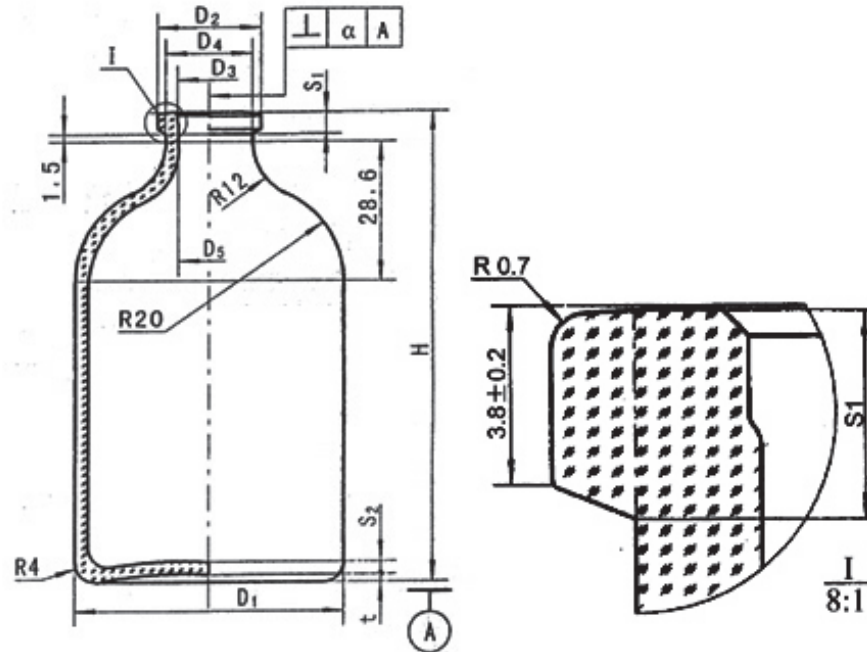

Ref. No.:	#111001
Glass :	USP Type II,III
Color:	Clear
Packing:	Carton
Packing Size:	599*285*306
Per Carton:	198pcs
Qty. per 20FCL:	99792pcs
Qty. per 40FCL:	210672pcs
G.W. (kgs/ctn):	20.5
N.W. (kgs/ctn):	19.5

Moulded injection vial for antibiotic; (Amber and Clear)

1. Quality Standard: Complying with the norm SFDA YBB00312002 and USP 36.
2. Material: Soda-Lime-Silica Glass
3. Glass Type: USP type II, III
4. Packing: Shrink wrapped first, then packed with carton, or customized
5. Performance: Hydrolytic Resistance shall comply with the requirements special for one of the following classes: ISO 4802-HC2, HC3. Internal pressure resistance shall withstand an internal pressure of 600kPa when tested. Thermal shock resistance shall withstand a thermal shock when subjected to a temperature difference of $\Delta^{\circ}\text{C}$ 42 in accordance with ISO7459.