


SPEC. 【8ml】 Dimension in mm

ITEM	BASIC	TOL.
Total Height H	46.8	+0.30,-0.40
OD of body D1	23	+0.30,-0.40
OD of lip D2	20	+0.10,-0.30
ID of lip D3	12.70	+/-0.20
OD of neck D4	≤16.5	
ID of neck D5	≥11.5	
Finish Height S1	4.3	+/-0.20
Thickness of bottom S2	3	+1.0,-1.50
Vertical axle deviation a	≤1.2	
Overflow capacity (ml)	≈10.0	
Mass (g)	≥14.5	
t	≈1	

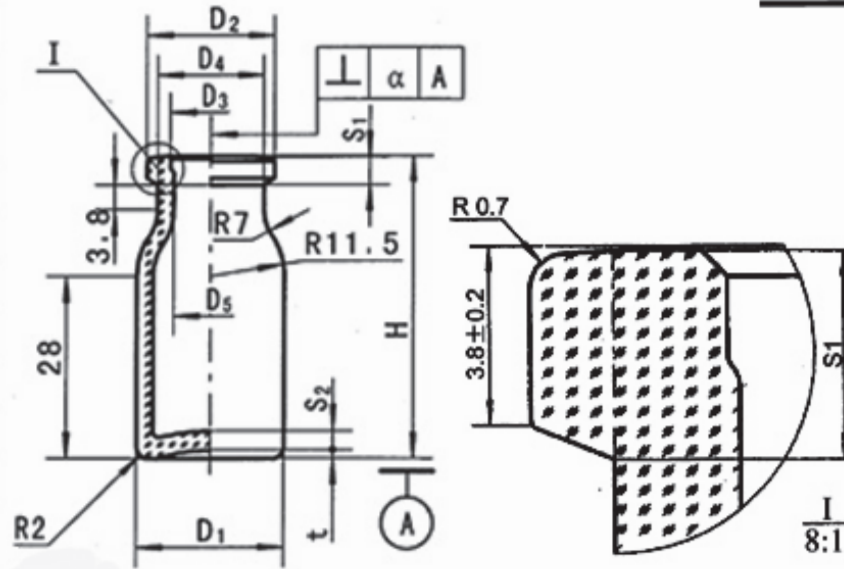

## Specification Sheet

Ref. No.:	#110081
Glass :	USP Type II,III
Color:	Clear
Packing:	Carton
Packing Size:	430*280*230
Per Carton:	936pcs
Qty. per 20FCL:	1029600pcs
Qty. per 40FCL:	Overweight
G.W. (kgs/ctn):	15.2
N.W. (kgs/ctn):	14.2

### Moulded injection vial for antibiotic: (Amber and Clear)

1. Quality Standard: Complying with the norm SFDA YBB00312002.
2. Material: Soda-Lime-Silica Glass
3. Glass Type: USP type II, III
4. Packing: Shrink wrapped first, then packed with carton, or customized
5. Performance: Hydrolytic Resistance shall comply with the requirements special for one of the following classes: ISO 4802-HC2, HC3. Internal pressure resistance shall withstand an internal pressure of 600kPa when tested. Thermal shock resistance shall withstand a thermal shock when subjected to a temperature difference of  $\Delta^{\circ}\text{C}$  42 in accordance with ISO7459.

eRRe  
Cam Şişe Ambalaj